



UNIVERSITY OF ILLINOIS  
EXTENSION

**GROWING A NEW GENERATION  
OF ILLINOIS FRUIT AND VEGETABLE FARMERS**

# IRRIGATION

Jeff Kindhart and Jeremy Shafer

April 2015














**Irrigation gun with reel cart**










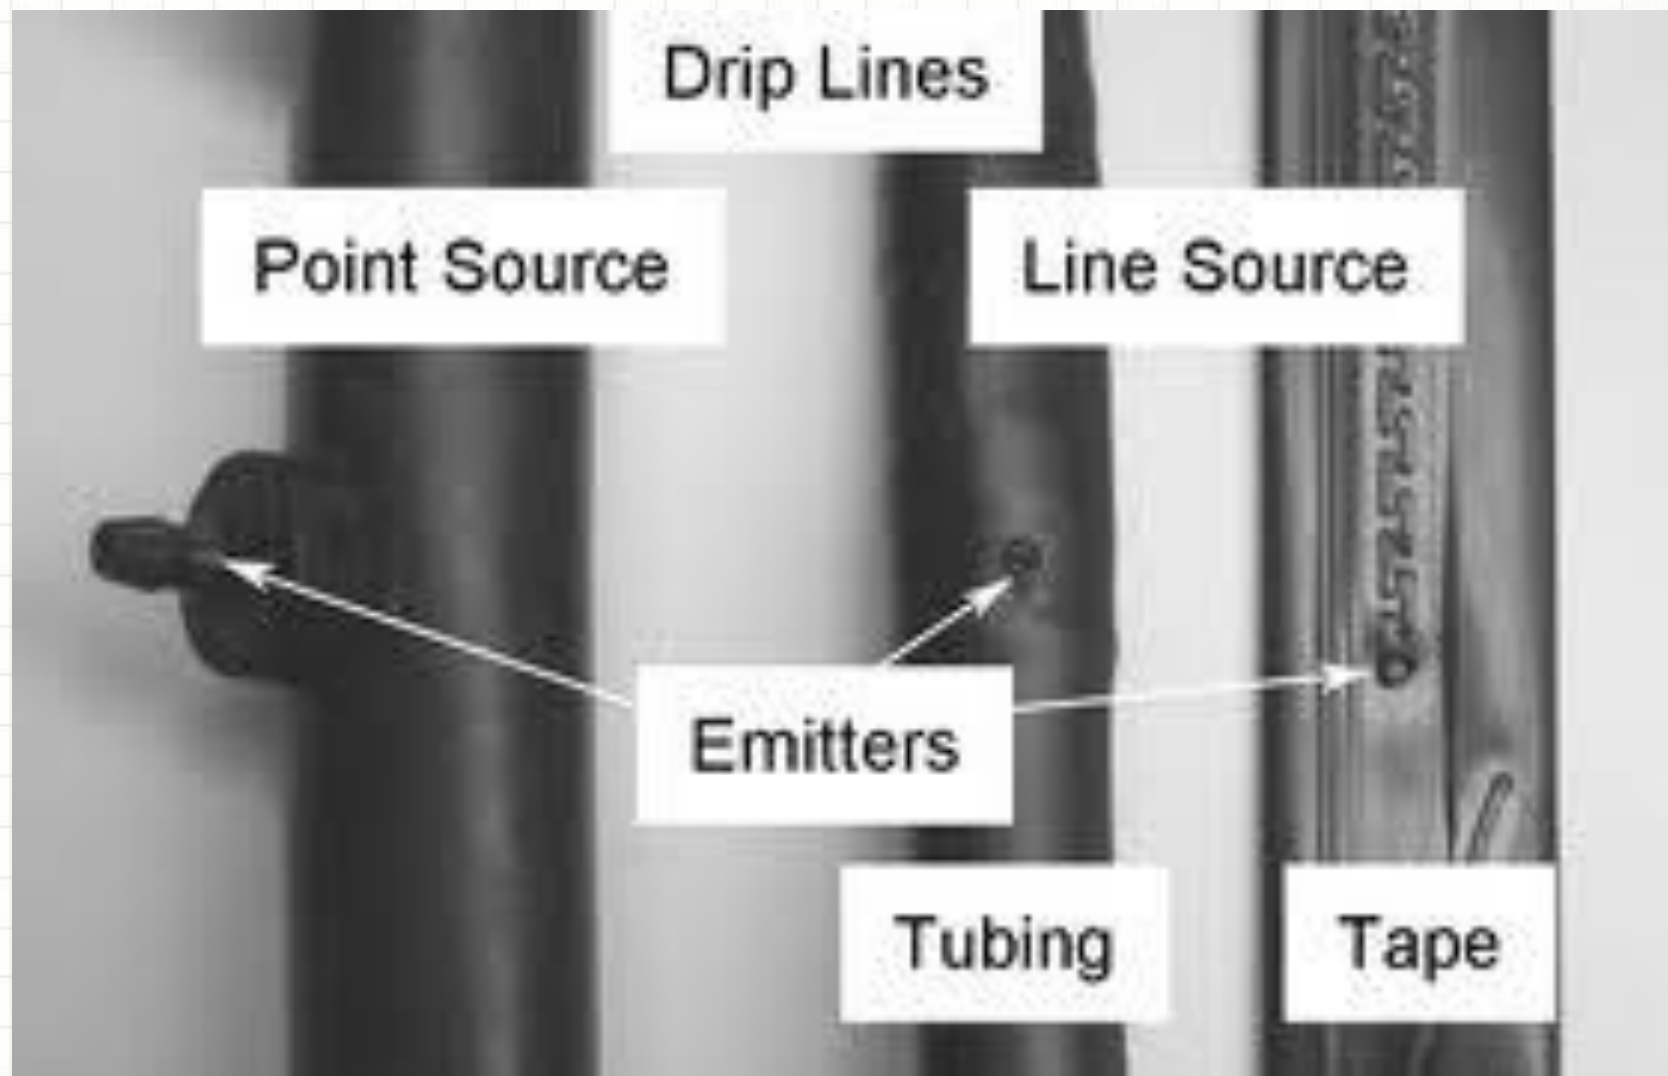





# Typical Drip System Layout

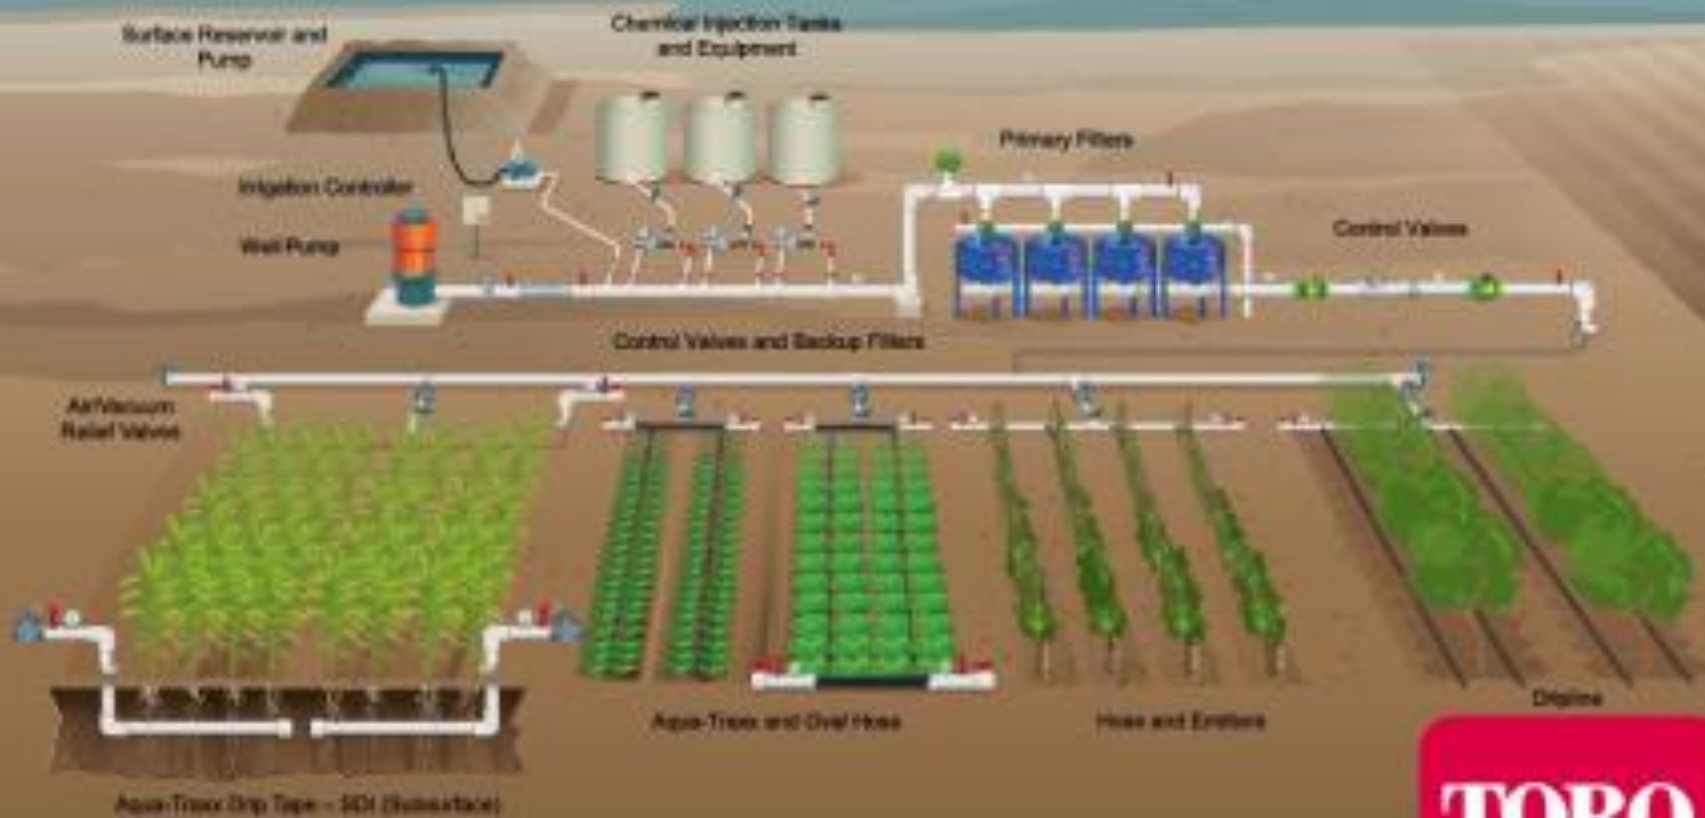



## SPECIFICATIONS

Wall thickness (mil):

0.540" (45 mil)

0.620" (45 mil)

0.690" (48 mil)


0.820" (60 mil)

Nominal flow rates (mil): 0.26, 0.4, 0.5, 1.0, 2.0

Common spacings: 18", 24", 30", 36", 42", 48", 60"

Recommended filtration: 120 mesh

Recommended operating pressure: 10 to 30 psi

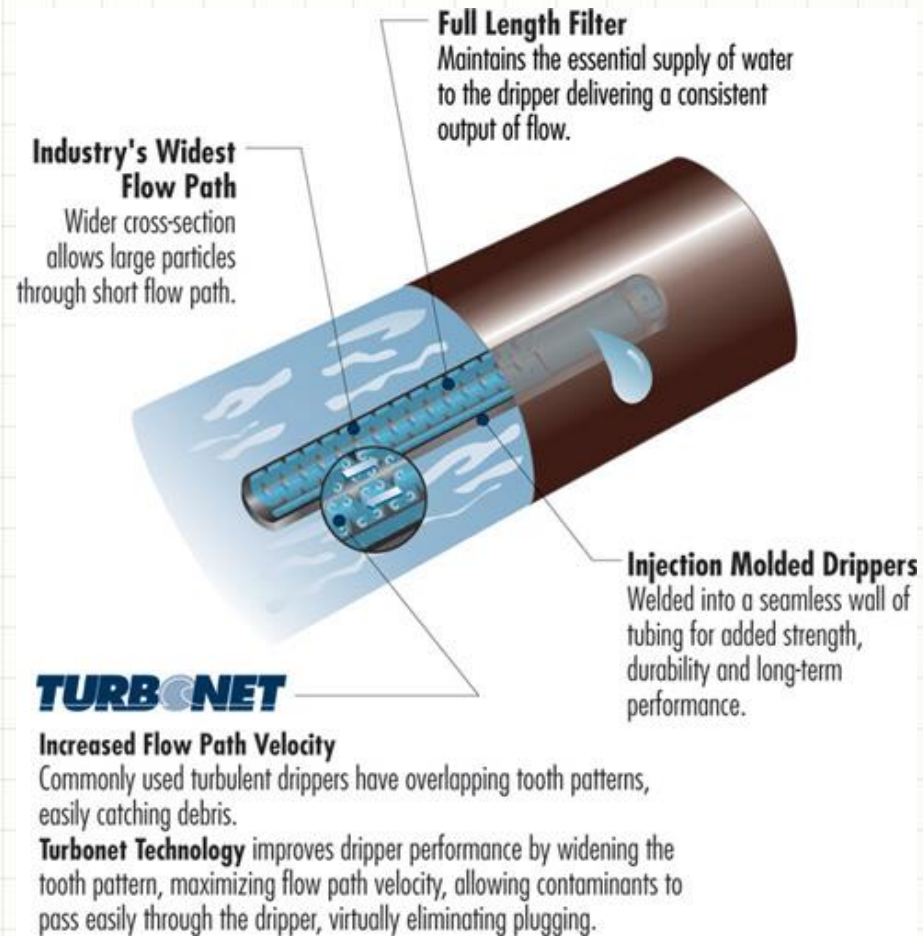





# Considerations for drip irrigation

- Water Source
- Design
- Operation and Maintenance
- Other



# Water Source Problems

- Surface
  - Herbicide contamination
  - Disease organisms
  - Size
  - Excessive algae
- Well
  - Size/Capacity
  - Iron
  - Sand
- Municipal
  - Volume/Pressure

# Surface Water Problems






# Algae Problems



# Algae Solutions



Sand Filter Diagram



Two TR60 Filters w/ Manifold



Single Filter Backwash Valve



NEW





# Water Source Problems

- Surface
  - Herbicide contamination
  - Disease organisms
  - Size
  - Excessive algae
- Well
  - Size/Capacity
  - Iron
  - Sand
- Municipal
  - Volume/Pressure














**Sand collection tank  
Optional for extra \$**

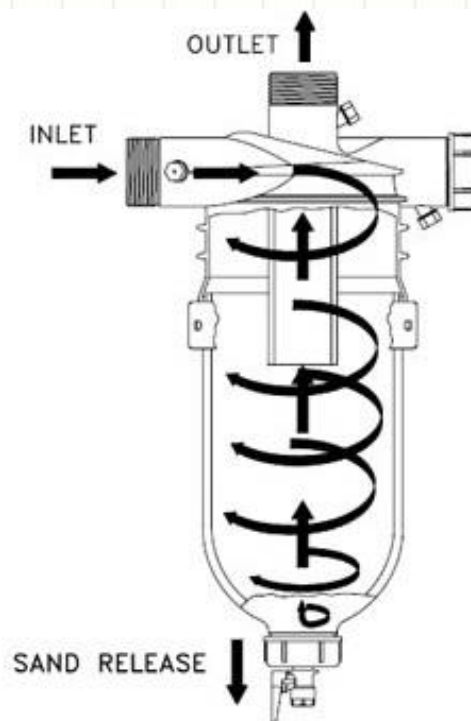

# Water Source Problems

- Surface
  - Herbicide contamination
  - Disease organisms
  - Size
  - Excessive algae
- Well
  - Size/Capacity
  - Iron
  - Sand
- Municipal
  - Volume/Pressure



# RPZ Backflow Preventer





FLOW RATE					
GPM	3/4"	1"	1-1/2"	2"	% Error
MIN	0.5	0.75	1.5	2	3
MAX	30	50	100	160	1.5
CONTINUOUS	15	25	50	80	
RANGE	2-30	3-50	5-50	8-160	



UNIVERSITY OF ILLINOIS  
EXTENSION





# Considerations for Drip Irrigation

- Water Source
- Design
- Operation and Maintenance
- Other


Flow rate and friction head loss  
for tubing and pipe sizes (Imperial)  
(based on 10 ft/s velocity)

Nom. dia. (in)	Inside dia. (in)	Flow rate (gpm)	Friction head loss (feet of head per feet of pipe)
1/4	0.311	2.4	2.15
1/2	0.527	6.8	1.08
3/4	0.745	13.6	0.69
1	0.995	24	0.48
1 1/2	1.6	63	0.26
2	2.067	105	0.19
2 1/2	2.469	149	0.15
3	3.068	230	0.117
4	4.026	400	0.084
6	6.065	900	0.051
8	8.125	1615	0.036
10	10.25	2570	0.027
12	12.25	3675	0.022
14	13.5	4460	0.0194




Laminar Flow

freshgasflow.com

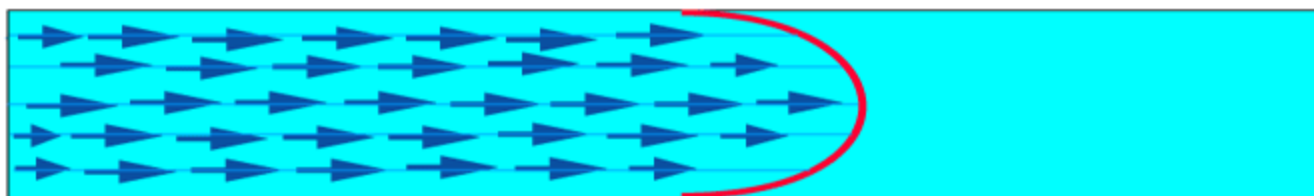


Turbulent Flow

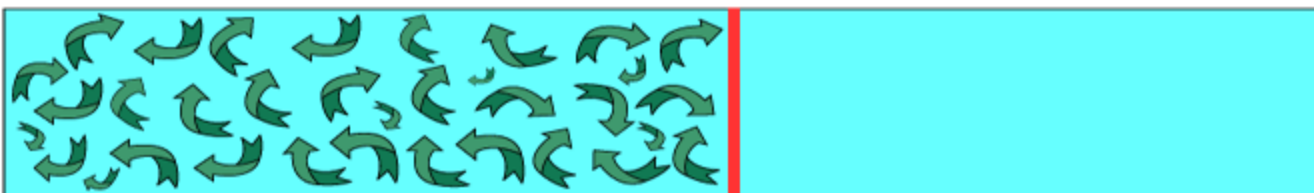

TURBULENT FLOW



LAMINAR FLOW

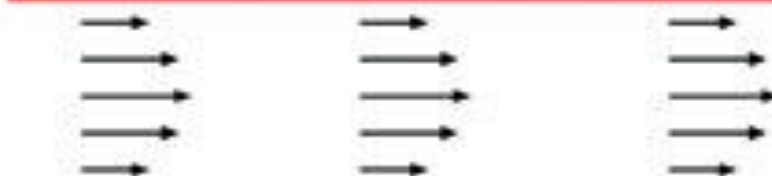

UNIVERSITY OF ILLINOIS  
EXTENSION



# Types of Problems

- Water Source
- Design
- Operation and Maintenance
- Other



## Outlet Spacing

4, 6, 8, 12, 16, 18 & 24 inch  
spacing available for most  
T-TAPE TSX wall thicknesses.

Contact your T-TAPE dealer  
for a complete product listing.


## Flow Rates

Various flow rates available to  
meet specific application  
needs.

## Common Flow Rates

.170	.....	.gpm/100 Ft.
.220	.....	.gpm/100 Ft.
.280	.....	.gpm/100 Ft.
.340	.....	.gpm/100 Ft.
.450	.....	.gpm/100 Ft.
.670	.....	.gpm/100 Ft.

## T-TAPE TSX

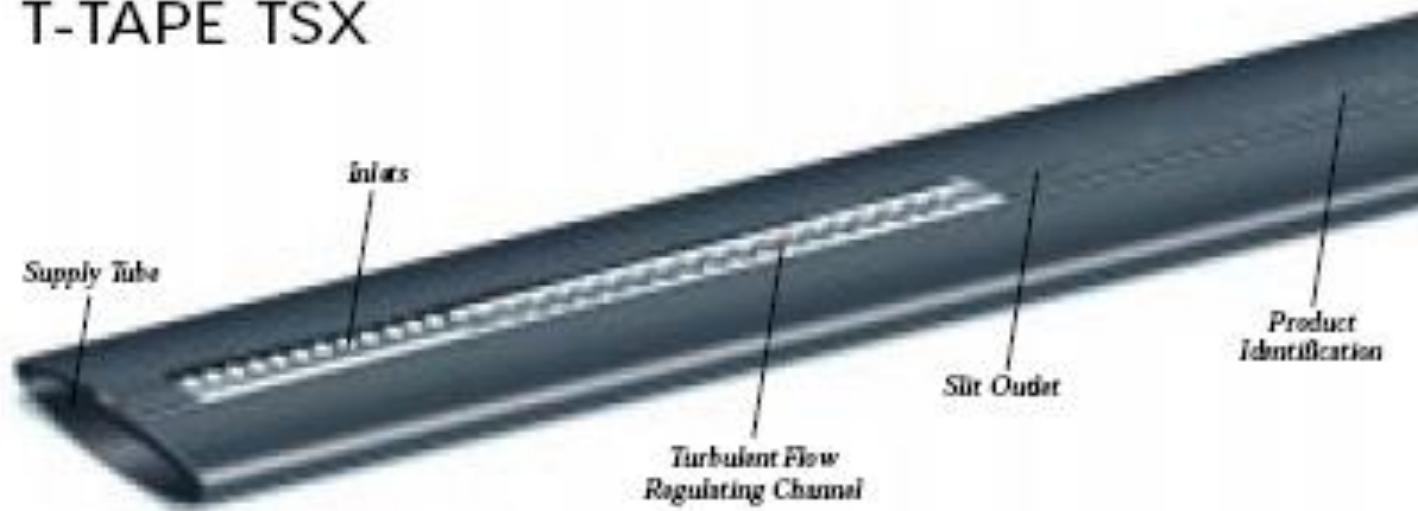




## T-TAPE PRODUCT IDENTIFICATION



UNIVERSITY OF ILLINOIS  
EXTENSION



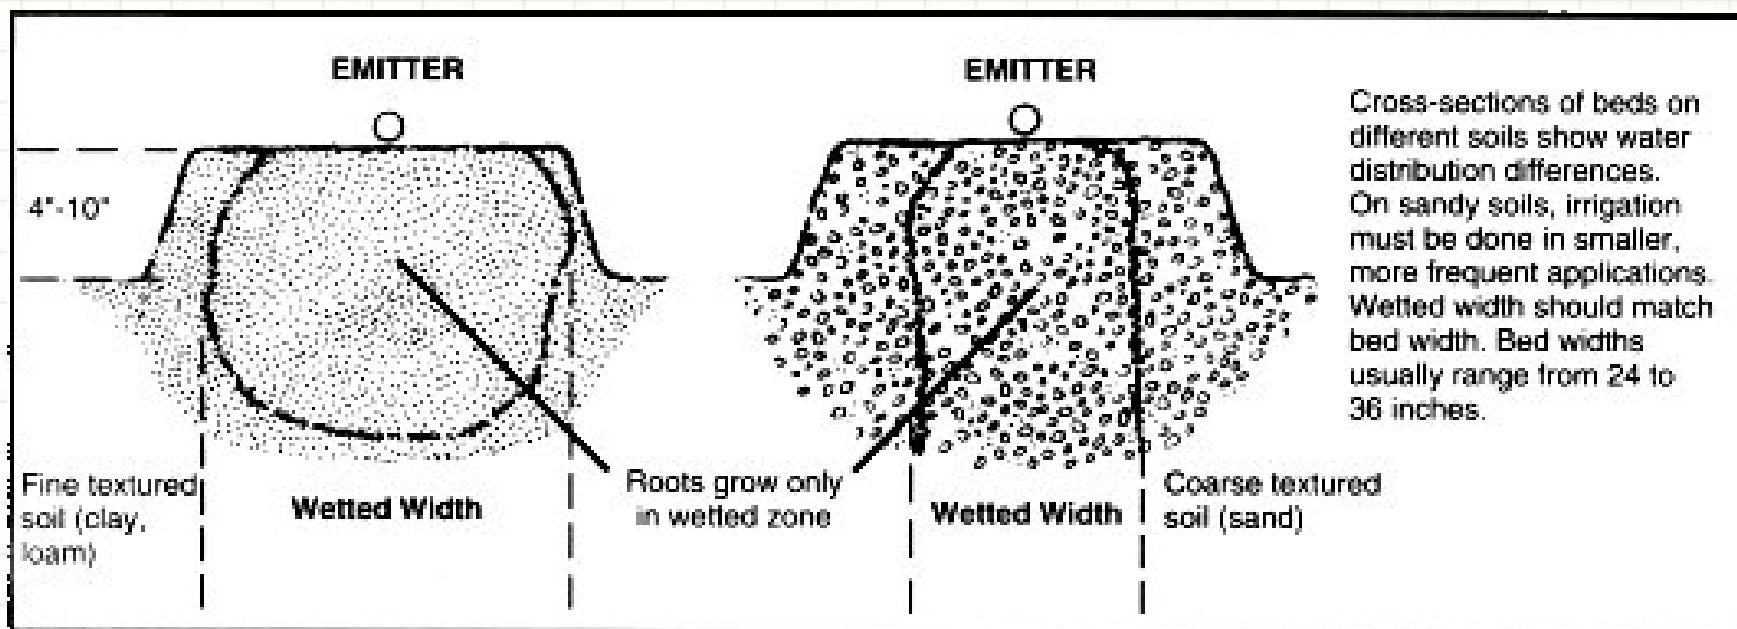





# Types of Problems

- Water Source
- Design
- Operation and Maintenance
- Other



# Clogging Emitters

- Physical
  - Silt
  - Sand
- Biological
  - Algae
  - Bacteria
- Chemical
  - Calcium, magnesium, iron, and manganese
  - Fertilizer

Constituent	Level of Concern		
	Low	Moderate	High
pH	<7.0	7.0-8.0	>8.0
Iron (Fe) mg/L	<0.2	0.2-1.5	>1.5
Manganese (Mn) mg/L	<0.1	0.1-1.5	>1.5
Hydrogen Sulfide (H <sub>2</sub> S) mg/L	<0.2	0.2-2.0	>2.0
Total Dissolved Solids (TDS) mg/L	<500	500-2000	>2000
Total Suspended Solids (TSS) mg/L	<50	50-100	>100
Bacteria Count (#/ml)	<10,000	10,000-50,000	>50,000

# Most Common Problem

- Management
- Management
- Management



# Monitor soil moisture




## Factors that influence soil moisture

- Sun
- Wind
- Rain
- Temp
- Relative humidity
- Crop removal

# Soil Moisture Monitoring Techniques

- The "Feel Method"
- Neutron Probe
- Electrical Resistance
- Soil Tension
- New Technology
- Computerized Irrigation Scheduling

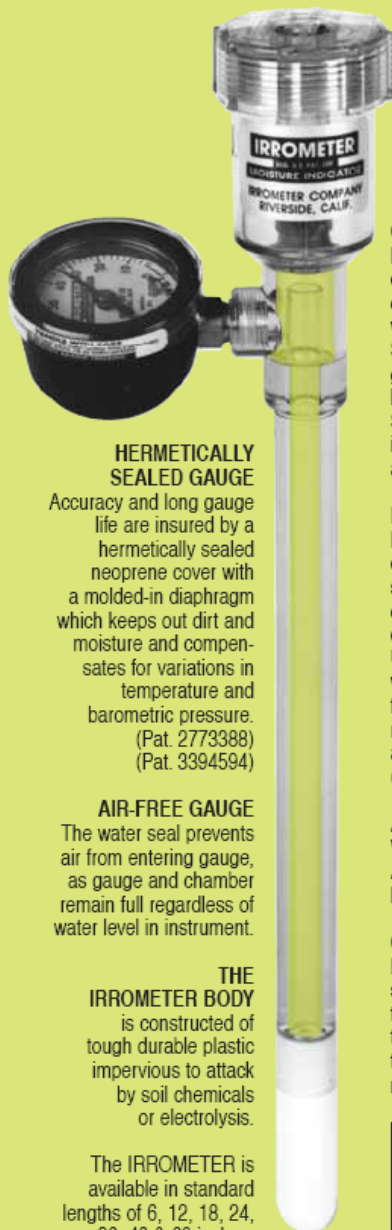

#### HERMETICALLY SEALED GAUGE

Accuracy and long gauge life are insured by a hermetically sealed neoprene cover with a molded-in diaphragm which keeps out dirt and moisture and compensates for variations in temperature and barometric pressure.  
(Pat. 2773388)  
(Pat. 3394594)

#### AIR-FREE GAUGE

The water seal prevents air from entering gauge, as gauge and chamber remain full regardless of water level in instrument.

#### THE IRROMETER BODY

is constructed of tough durable plastic impervious to attack by soil chemicals or electrolysis.

The IRROMETER is available in standard lengths of 6, 12, 18, 24, 36, 48 & 60 inches.

#### CLOSURE

Large cap for easy operation and better control. Cap removed when filling reservoir. Submerged valve gives a positive leakproof seal. Servicing is instantaneous—a twist of the wrist.

#### RESERVOIR

Holds a reserve supply of fluid sufficient for several irrigation cycles under average operating conditions. Unscrewing cap part way releases air and fills tube. (This is to replace fluid lost by action of drying soil.)  
(Pat. 2878671)


#### ALL SOLVENT WELDED JOINTS ARE PERMANENTLY LEAKPROOF

#### CERAMIC TIP

Has many times the strength of conventional tips. It is more porous to give quick response to variations in soil moisture.

#### MODEL "SR" (not pictured)



Threaded tip connection make tip replacement easy. Uses o-ring seal.

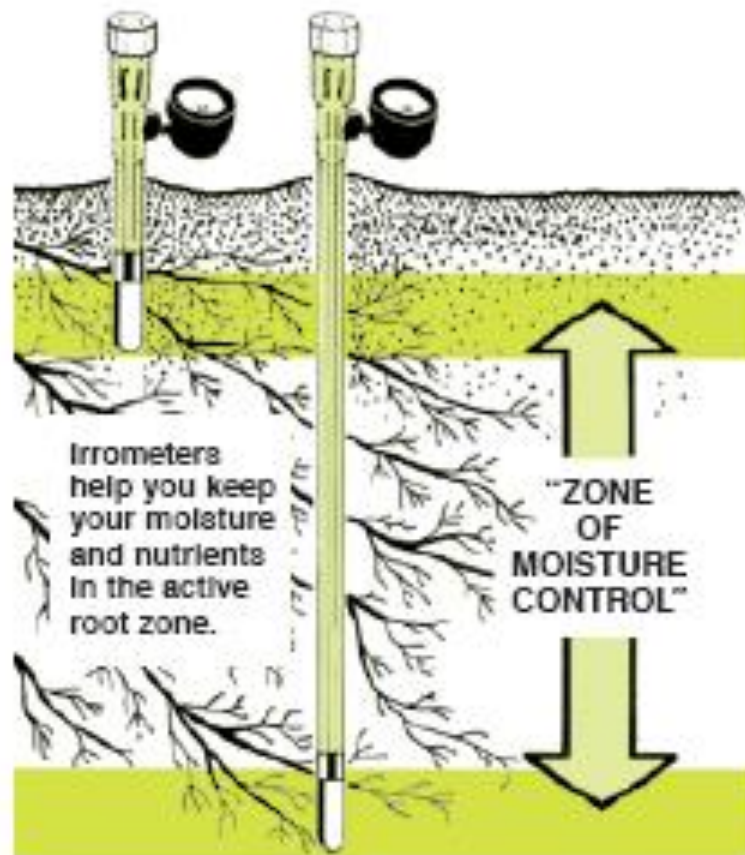

UNIVERSITY OF ILLINOIS  
EXTENSION





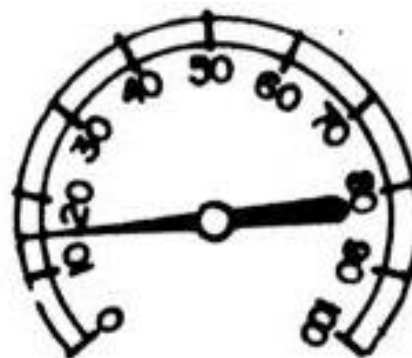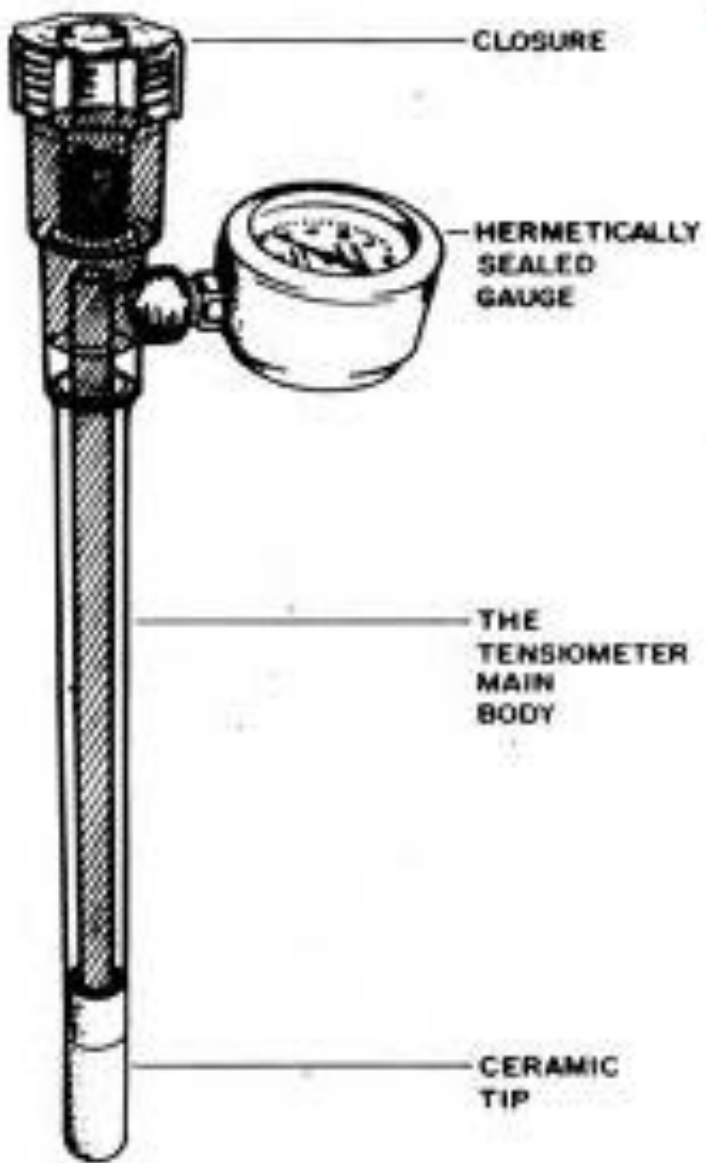


CROP	Shallow Instrument (Inches)	Deep Instrument (Inches)	For Extra Depth, Set at (Inches)	CROP	Shallow Instrument (Inches)	Deep Instrument (Inches)	For Extra Depth, Set at (Inches)
Alfalfa .....	18-24	36-48	60-70	Melons .....	18	36	
Almonds .....	24	48	72	Milo .....	24	48	
Apples .....	20	40	60	Mint .....	12	24	
Apricots .....	24	48	72	Monterey Pines, Firs .....	12	24	
Artichokes .....	18	36		Mums .....	12	(Placed 4-6")	
Asparagus .....	18-24	36-48		Mustard .....	18	36	
Avocados .....	12	24	36	Nectarines .....	18	36	
Bananas .....	12	24		Oats .....	18	36	
Barley .....	18	36		Okra .....	18	36	
Beans (bush) .....	10		18	Olives .....	24	48	60
Beans (Lima) .....	18	36		Onions .....	12		
Beans (Pole) .....	18	36		Papaya .....	12	24	
Beets (sugar) .....	18	36		Parsnips .....	18	36	
Beets (table) .....	12-18	24-36		Peaches .....	18	36	60
Blueberries .....	12	24		Peanuts .....	12	24	
Broccoli .....	12	20		Pears .....	18	36	48
Cabbage .....	12	20		Peas .....	18	36	
Canaigre .....	18	36	48	Pecans .....	18	36	48
Cantaloupe .....	18	36		Peppers .....	15	30	
Carnations .....	12	(Placed 4-6")		Permanent Pastures .....	8-15		24-30
Carrots .....	12	24		Persimmons .....	18	36	
Cauliflower .....	12	24		Pineapple .....	15	30	
Celery .....	10	20		Pistachio Nuts .....	24	48	60
Chard .....	12	24		Pomegranates .....	18	36	
Cherries .....	24	48		Potatoes (Irish) .....	8-10	18	
Christmas tree .....	12	24		Potatoes (Sweet) .....	18	36	
Citrus; orange, lemon, grapefruit .....	18	36		Plums .....	24	48	72
Coffee .....	18-24	36-48		Prunes .....	24	48	72
Corn (sweet) .....	12	30		Pumpkin .....	18	36	48
Corn (field) .....	18	36		Radishes .....	12		
Cotton .....	18	36	48	Raspberries .....	18	36	
Cranberries .....	18	36		Sorghum .....	18	36	
Cucumbers .....	18	36		Soy Beans .....	18	36	60
Date palm .....	24	48	60	Spinach .....	12	24	
Egg Plant .....	12	24		Squash (Summer) .....	15	30	
Figs .....	18	36		Strawberries .....	6	12	
Garlic .....	12	24		Sudan Grass .....	18-24	36-48	
Grain and Flax .....	18	36		Sugar Cane .....	18	36	
Grapes .....	24	48	60	Sunflowers .....	24	48	60
Hops .....	24	48	60	Tea .....	12	24	
Jojoba .....	18	36		Tobacco .....	8-15	30	
Kiwi .....	18	36	48	Tomatoes .....	18	36	
Ladino Clover .....	10	20		Turnips .....	18	36	
Lettuce .....	12			Walnuts .....	24	48	72
Macadamias .....	12	24	36	Watermelon .....	18	36	48
Maize .....	18	36		Wheat-Hay .....	18	36	



Table 2. Soil Water Deficit Estimates for Different Soil Textures and Selected Tensions

Soil Texture	Soil Tension in Centibars						
	10	30	50	70	100	200	1500*
	Soil Water Deficit - Inches Per Foot of Soil						
Coarse sands	0	0.1	0.2	0.3	0.4	0.6	0.7
Fine sands	0	0.3	0.4	0.6	0.7	0.9	1.1
Loamy sands	0	0.4	0.5	0.8	0.9	1.1	1.4
Sandy loam	0	0.5	0.7	0.9	1.0	1.3	1.7
Loam	0	0.2	0.5	0.8	1.0	1.6	2.4
*1500 cbs refers to the permanent wilting point and the soil deficit value is equal to the soil's total available water capacity							



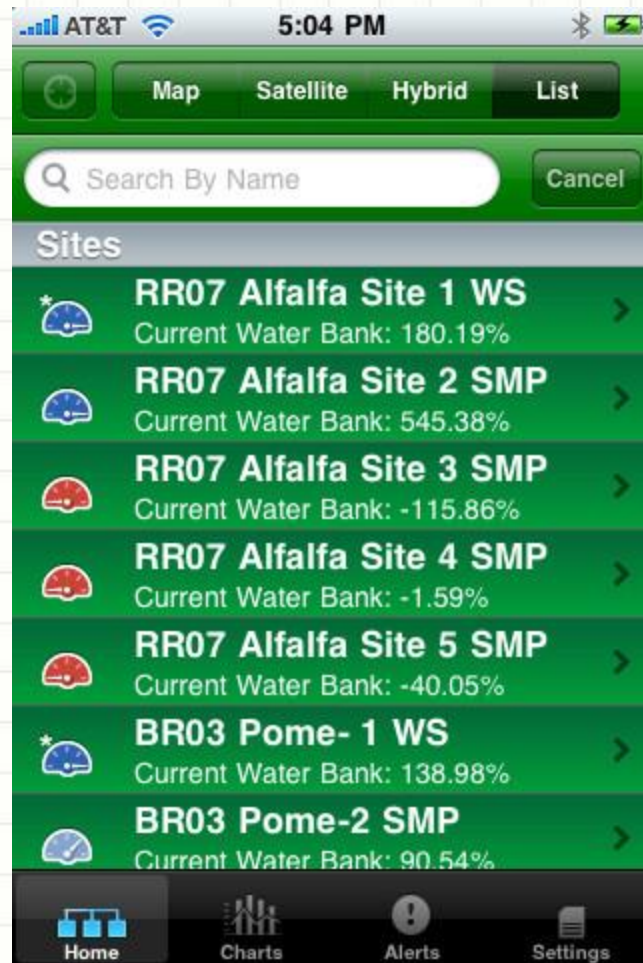









# Resources

- [Drip Irrigation for Vegetable Production](#) (and info sources at the end)
- [Maintaining Drip Irrigation Systems](#) (Kansas State University)
- [Drip Irrigation](#) (Washington State University Small Farms Team)
- [Drip Irrigation Web Links](#) (University of Missouri)
- [Indiana Irrigation](#), a Midwestern supplier
- [DripWorks](#), a supplier for small growers
- [IrrigationTutorials.com](#)

# To reach us

---

## Contacts

## Contact information

Jeff Kindhart

[jkindhar@illinois.edu](mailto:jkindhar@illinois.edu)

618-695-2770

Rick Weinzierl

[weinzier@illinois.edu](mailto:weinzier@illinois.edu)

217-244-2126

---

